



Malleable cast iron fittings

1 Long sweep bend 90°, ISO/EN G4

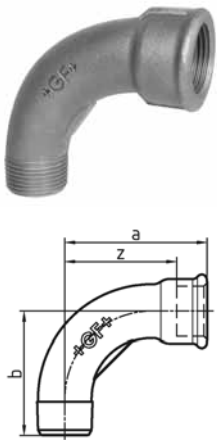

EN		Dim. [inch]	Code	a [mm]	b [mm]	z [mm]
•	B	1/8	770 001 101	35	32	28
•	G	1/8	770 001 201	35	32	28
•	B	1/4	770 001 102	40	36	30
•	G	1/4	770 001 202	40	36	30
•	B	3/8	770 001 103	48	42	38
•	G	3/8	770 001 203	48	42	38
•	B	1/2	770 001 104	55	48	42
•	G	1/2	770 001 204	55	48	42
•	B	3/4	770 001 105	69	60	54
•	G	3/4	770 001 205	69	60	54
•	B	1	770 001 106	85	75	68
•	G	1	770 001 206	85	75	68
•	B	1 1/4	770 001 107	105	95	86
•	G	1 1/4	770 001 207	105	95	86
•	B	1 1/2	770 001 108	116	105	97
•	G	1 1/2	770 001 208	116	105	97
•	B	2	770 001 109	140	130	116
•	G	2	770 001 209	140	130	116
•	B	2 1/2	770 001 110	176	165	149
•	G	2 1/2	770 001 210	176	165	149
•	B	3	770 001 111	205	190	175
•	G	3	770 001 211	205	190	175
•	B	4	770 001 112	260	245	224
•	G	4	770 001 212	260	245	224

2 Long sweep bend 90°, ISO/EN G1

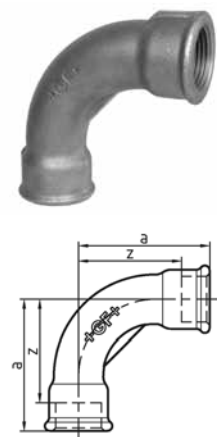

EN		Dim. [inch]	Code	a [mm]	z [mm]
•	B	1/4	770 002 102	40	30
•	B	1/4	770 002 202	40	30
•	B	3/8	770 002 103	48	38
•	B	3/8	770 002 203	48	38
•	B	1/2	770 002 104	55	42
•	B	1/2	770 002 204	55	42
•	B	3/4	770 002 105	69	54
•	B	3/4	770 002 205	69	54
•	B	1	770 002 106	85	68
•	B	1 1/4	770 002 107	105	86
•	B	1 1/4	770 002 207	105	86
•	B	1 1/2	770 002 108	116	97
•	B	1 1/2	770 002 208	116	97
•	B	2	770 002 109	140	116
•	G	2	770 002 209	140	116
•	B	2 1/2	770 002 110	176	149
•	B	2 1/2	770 002 210	176	149
•	B	3	770 002 111	205	175
•	B	4	770 002 112	260	224